


# Operational guide

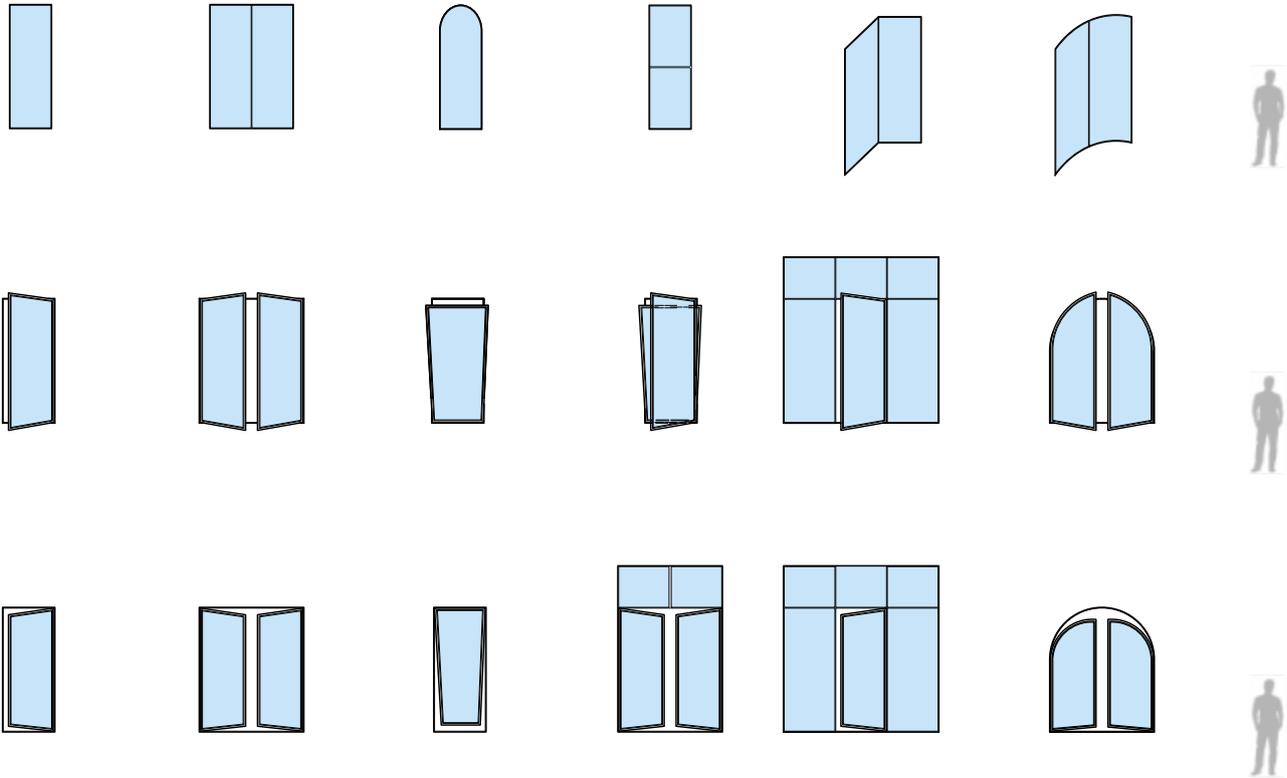

	OS2-65		OS2-75, BV, MB		EBE-65		EBE-85	
	L (mm)	H (mm)	L (mm)	H (mm)	L (mm)	H (mm)	L (mm)	H (mm)
<b>Fixed</b>	-*	-*	-*	-*	-*	-*	-*	-*
<b>Casement Window</b>	1000	2750	1000	3050	1100	3355	1100	3660
<b>French Window</b>	2000	2750	2000	3050	2200	3355	2200	3660
<b>Awning</b>	1500	1100	1500	1100	1000	1800	1000	1800
<b>Hopper</b>	1500	1300	1500	1300	1600	1200	1600	1200
<b>Tilt &amp; Turn (single)</b>	Not available		1200	2700	1200	2800	1200	2800
<b>Tilt &amp; Turn (double)</b>	Not available		2200	2700	2400	2800	2400	2800
	L (in)	H (in)	L (in)	H (in)	L (in)	H (in)	L (in)	H (in)
<b>Fixed</b>	-*	-*	-*	-*	-*	-*	-*	-*
<b>Casement Window</b>	40"	108"	40"	120"	44"	132"	44"	144"
<b>French Window</b>	80"	108"	80"	120"	88"	132"	88"	144"
<b>Awning</b>	59"	43"	59"	43"	40"	70"	40"	70"
<b>Hopper</b>	59"	51"	59"	51"	63"	47"	63"	47"
<b>Tilt &amp; Turn (single)</b>	Not available		48"	108"	48"	110"	48"	110"
<b>Tilt &amp; Turn (double)</b>	Not available		94"	108"	94"	110"	94"	110"

**Dimensional Limits** - The dimensions and technical details provided are approximate and may change depending on the specific project requirements and structural constraints

\*Fixed units offer sizing flexibility. Dimensions depend on glass performance, structural load, and, where required, certified limits. Please contact us for tailored solutions.